THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
HG	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECR-08-005276	28FEB08	SBY	RZ

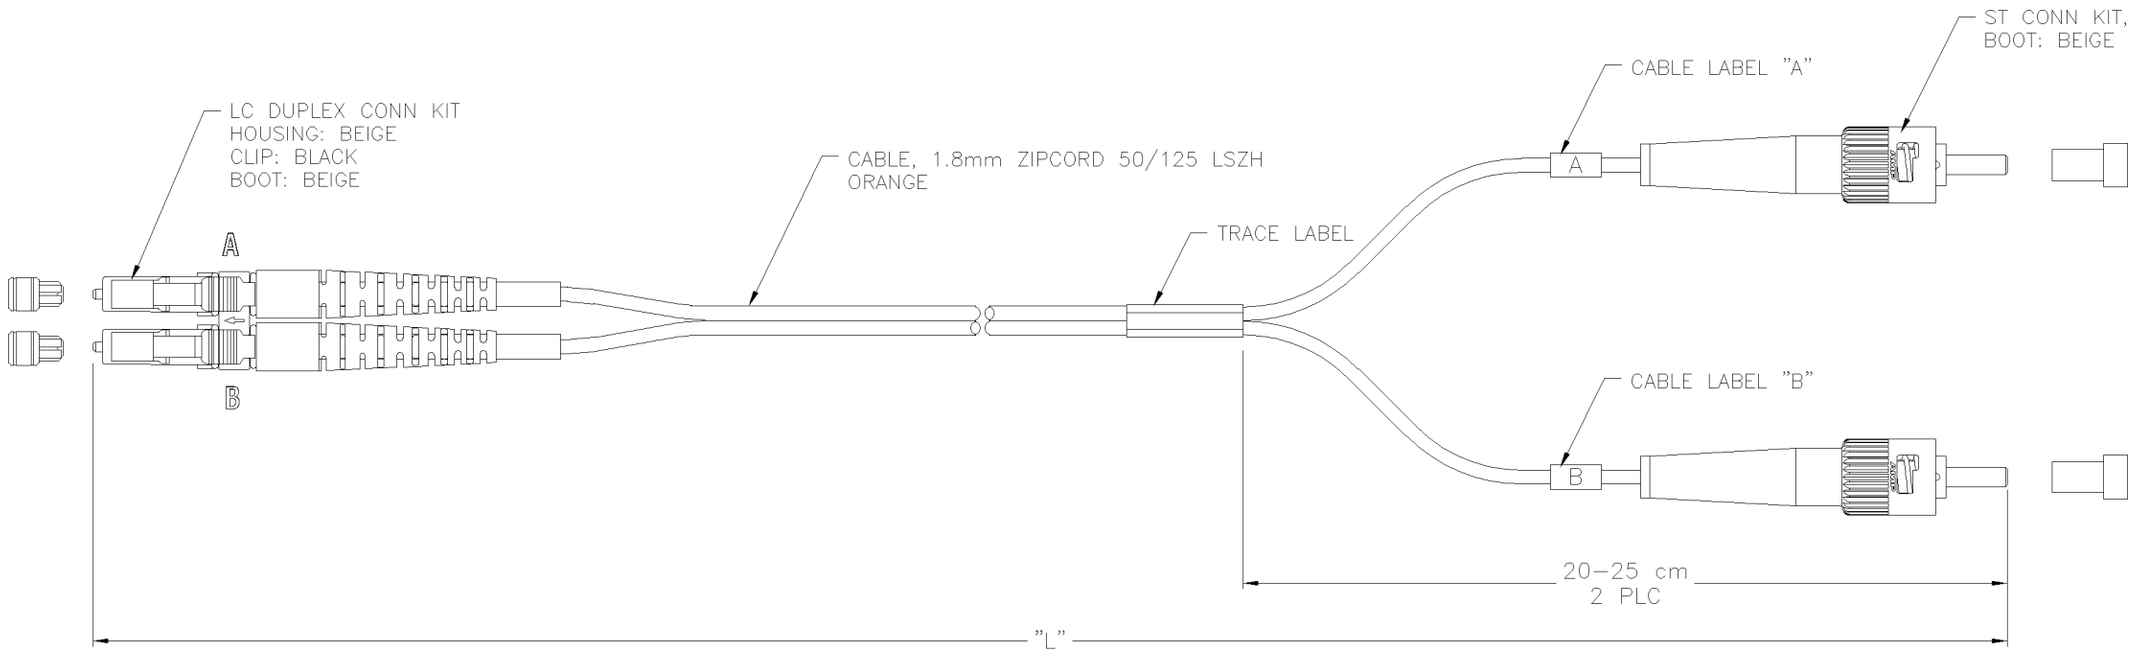

NOTES:

1. LC/PC CONNECTOR:
   ATTENUATION ≤ 0.3 dB MEASURED AT 1300 nm
2. ST/PC CONNECTOR:
   ATTENUATION ≤ 0.5 dB MEASURED AT 1300 nm
3. CABLE INFO:
   - CORE DIAMETER: 50/125um
   - OUTER BUFFER DIAMETER: 1.8x3.7mm
   - OUTER BUFFER COLOUR: WHITE/YELLOW
   - OUTER BUFFER MATERIAL: LOW SMOKE ZERO HALOGEN
4. THE CABLE COMPLIES TO:
   FLAME RETARDAMT (IEC 60332–1 & IEC 60332–3)
   SMOKE EMISSION (IEC 61034/BS7622)
   HALOGEN–FREE (IEC 60754/BS 6425)
   LIMITING OXYGEN (ASTM D 2863 35%)

PART NUMBER	"L" (METER)	* THE TOLERANCES OF STANDARD LENGTH REFER TO CUSTOMER DRAWING 1206850
X–1568757–Y	XY,0	

LC		ST
A	⟷	A
B	⟷	B

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN SHI BI YUN 15JUN06
CHK ALLEN GUMP 15JUN06
APVD RICHARD ZHAO 15JUN06
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

Tyco Electronics
Tyco Electronics Nederland BV
's–Hertogenbosch, Netherlands

NAME FOMM50 LEAD 1.8MZ LSZH LC/DPX – ST
–
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1568757	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV A

1568757